
# Frameless Shower Screen (Hinge Door) Installation Instruction

#### Parts:

		T
Code	Photo	Description
ACC-F7 / 6137		Wall Bracket (Glass Panel to Wall, Glass Shelf to Wall)
ACC-F6 / 6136		Shelf Bracket (Glass Shelf to Glass Panel)
ACC-F4/ 6140		Floor Bracket (Glass Panel to Floor)
6208 / 180 Hinge		Glass to Glass Hinge – 180 degree
6207 / 135 Hinge		Glass to Glass Hinge – 135 degree
6205 / Wall Hinge		Wall Hinge (Open in and out)
812 / Knob Handle		Door Knob
BEK / Square Knob		Door Knob
Shelf 2	0	Glass shelf with 2 holes (hole 14 — 17 in Installation Diagram)
Shelf <sub>3</sub>	•	Glass shelf with 2 holes (hole 15 & 17 in Installation Diagram). For use for Panel B & C without shelf Hole

### Shower Screen Style

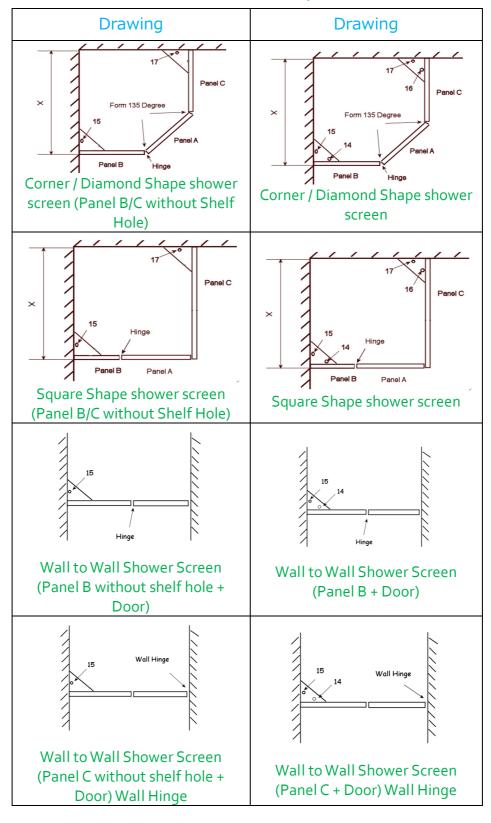

### Shower Panels

Drawings	Items	Description
		> Door hinged on this panel
○ 1 5 <sub>1</sub> 0 2	Hinge Panel (Panel B)	➤ For Diamond Shape, Wall to
2000mm		Wall Glass Hinge, and Square
6		Shape Shower Screen.
) 3 4 b		➤ Glass Shelf Hole Option
Panel B (Hinge Fixed Panel)		a) With Hole 2, Use glass
		Shelf2 & ACC-F6
200 <mark>6</mark> mm		b) Without Hole2, Use
. 3 4		glass Shelf3 and silicone
b Panel B (Hinge Fixed Panel)		to secure the glass shelf
		to Panel B
37	Door Panel	Door Panel
9 1980mm		➤ For Diamond Shape, Wall to
		Wall Glass Hinge, and Square
580mm OR 610mm		Shape Shower Screen.
Panel A (Door)		> Fixed Panel / Return Panel
12 °	Fixed Panel / Return Panel (Panel C)	➤ For Diamond Shape, Wall to
11°		Wall Glass Hinge, Square
2000mm		Shape Shower Screen or as
10 13		Single Fixed Panel.
Panel C (Fixed Panel)		➤ Glass Shelf Hole Option
12		a) With Hole 11, Use glass
20 <del>0</del> 0mm		Shelf2 & ACC-F6
		b) Without Hole 11, Use
10 13		glass Shelf3 and silicone
c Panel C (Fixed Panel)		to secure the glass shelf
		to Panel C

Before drill any hole on the tiled wall makes sure you measure all the distance correctly and mark them on the right position of the tile wall. After the hole is drilled, adjustment is limited.

The Bracket SSC-F7 (6137)(wall bracket) is used to secure the glass panel to wall, i.e. connect tiled wall to glass panel and glass shelf at point 1, 3, 12, 13, 15 & 17.

The Bracket SSC-F6 (6136) is used to secure glass shelf2 to glass panel, i.e. connect glass shelf2 (point 14 & 16) to Panel B (point 2) and Panel C (point 11). (Note: Some panel does not have Hole 2 & 11, Use Shelf3 and silicone to secure the shelf3 to panel B/C)

The Bracket SSC-F4 (6140)(floor bracket) is used to attach the Panel B (point 4) and Panel C (point 10) to the floor.

The Hinges ( $135^{\circ}$  for diamond,  $180^{\circ}$  for square, wall to wall) should be installed at point 5 & 7, 6 & 8.

The rubber strip needs to be attached under the Panel A (Door) after cut to right size. The metal strip should be attached to the floor under the Panel A (Door).

After installation completed, silicon should be put between panel B/C and wall or floor. Handle (model number various for different styles) needs to be attached on hole 9 on panel A.

In Corner (Diamond) shower screen and the Square shower screen, Panel B is the hinge panel (with hinge cutout), Panel C is the return panel (without hinge cut out). See invoice for size of each panel.

## Warranty does not cover glass.

The safety glass featured in all Shower Screens cannot be cut, trimmed or altered in any way. Shower screen should install by a license installer.

#### Size of panel:

\*(The complete Size, the 'X' in the diagram above is from the Wall to outside of glass including the 10mm thickness of the glass)